




PowerLead Puto PLD003 Zoom Button Replacement

This guide will show you how to replace the zoom button.

Written By: Justin Tew

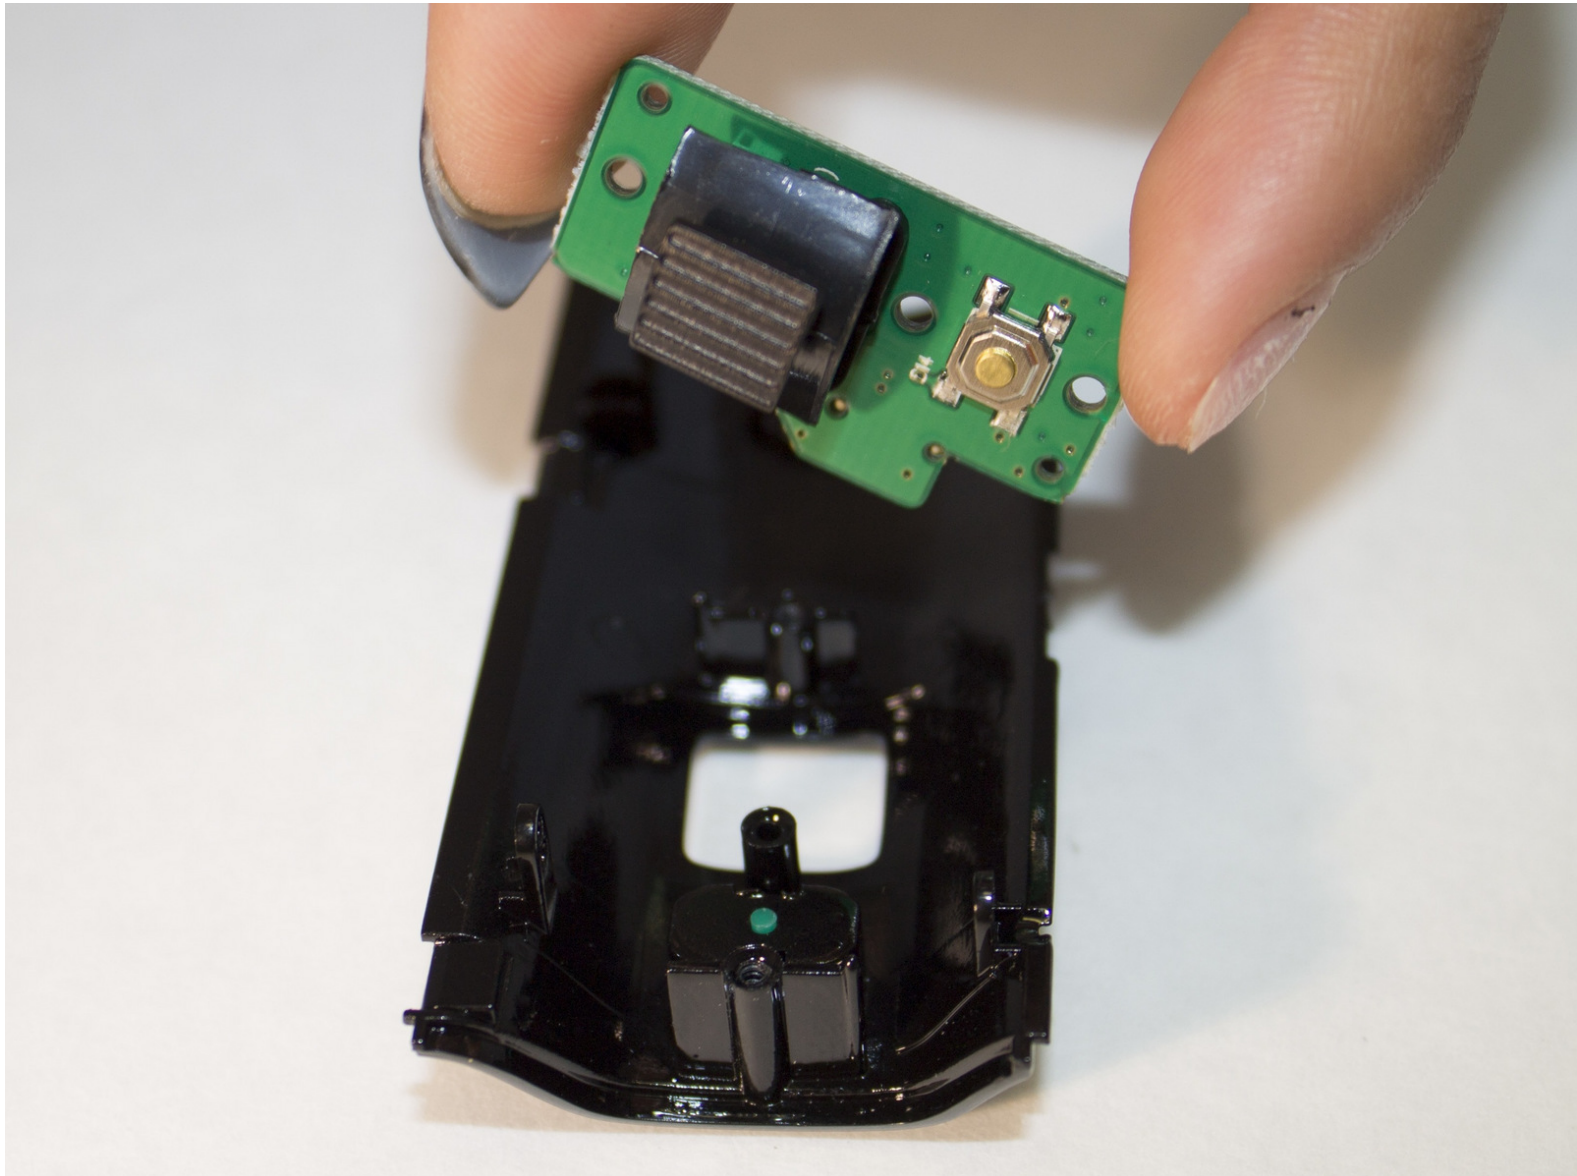

INTRODUCTION

This guide shows how to remove the side panel from the camera, how to remove the back panel, and how to replace the zoom button.



TOOLS:


- [2mm Screwdriver, Phillips Head](#) (1)



PARTS:


- [Replacement Zoom Button](#) (1)

Step 1 — Side Panel

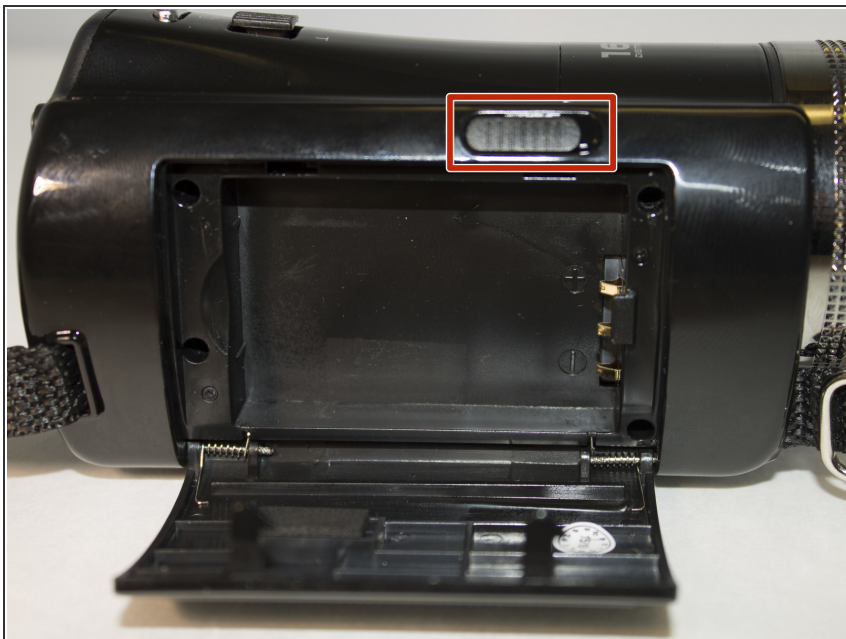

- Slide the battery eject button to open battery door.

Step 2

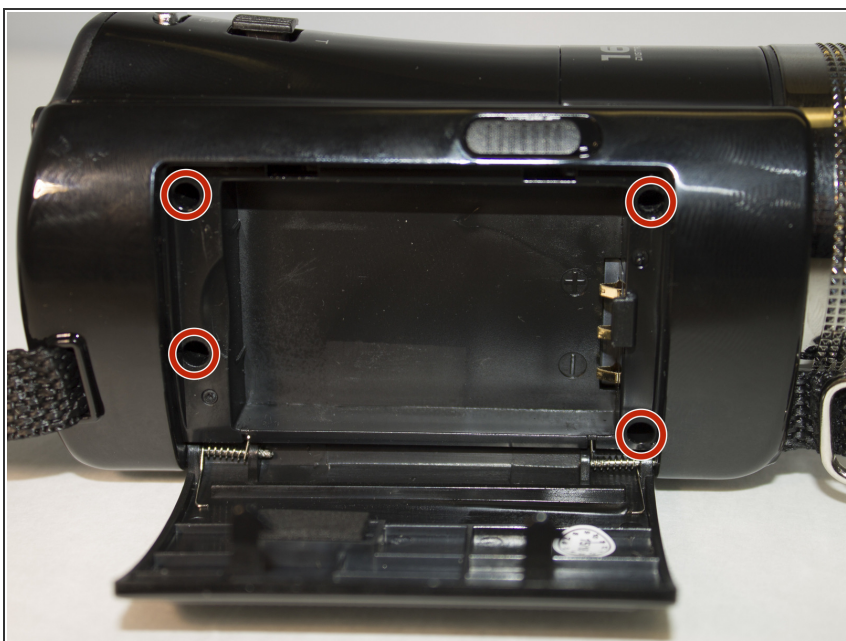


- With the battery door open, carefully unscrew all four 5mm Phillips #1 screws.

Step 3





- Place the camera so that the underside is facing up.
- Using your Phillips screw driver, carefully remove the four 5mm Phillips #1 screws.

Step 4

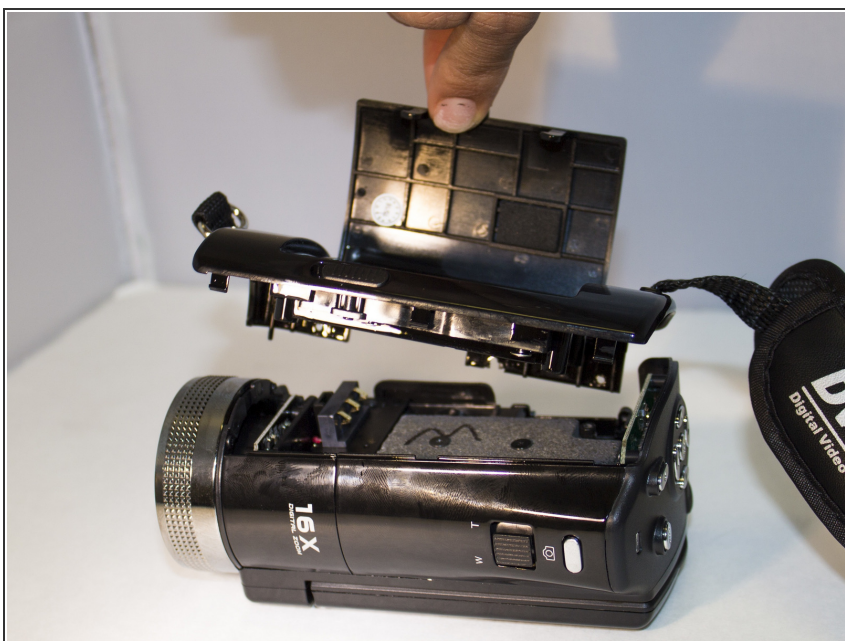


- Place the camera on its side with the screen facing down.
- Gently pull up on the side panel to remove it from the camera.

Step 5 — Zoom Button

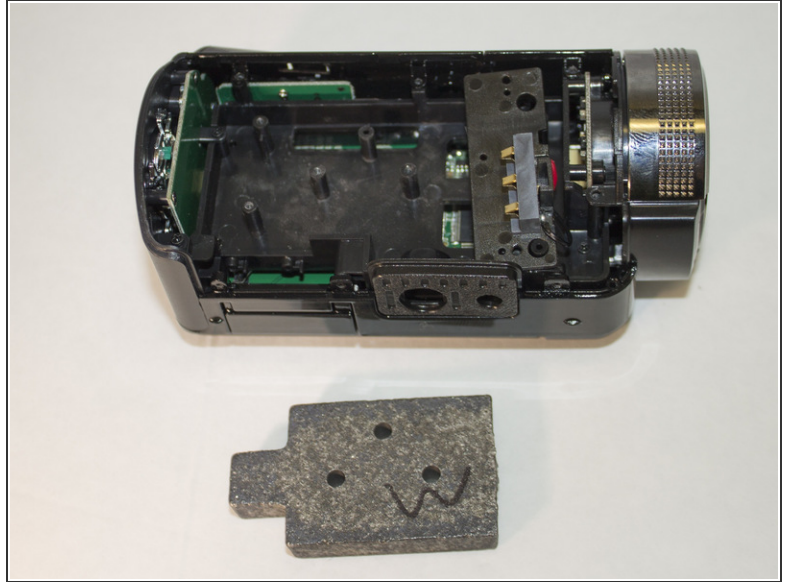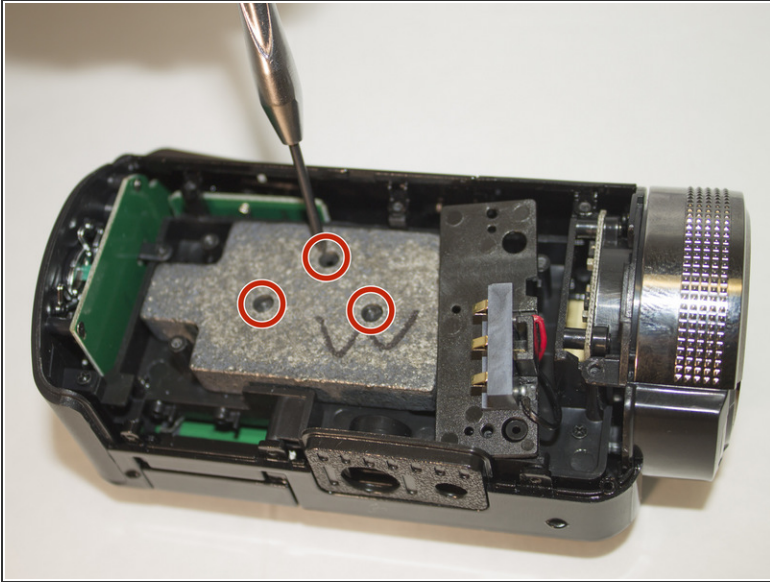


- Remove the 4 mm Phillips #1 screws holding the weight.
- Remove the weight.

Step 6

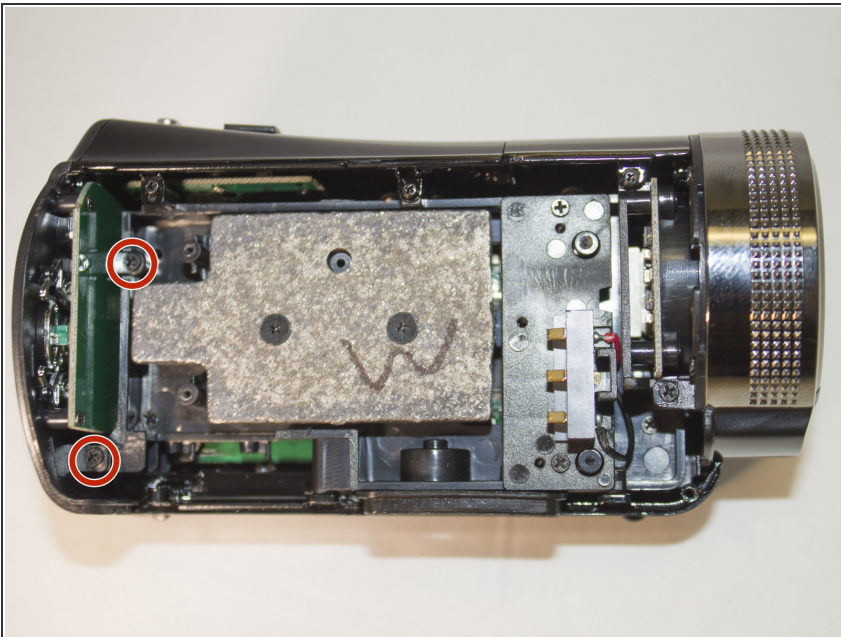



- Remove the two 4 mm Phillips #1 screws holding the back panel in place.

Step 7

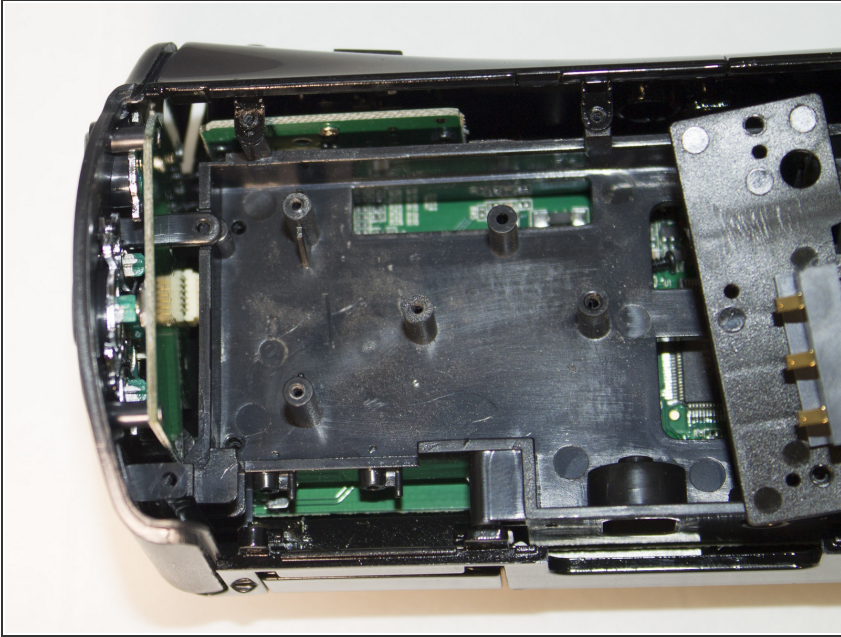


- Apply pressure to the back panel, away from the camera to remove.

Step 8

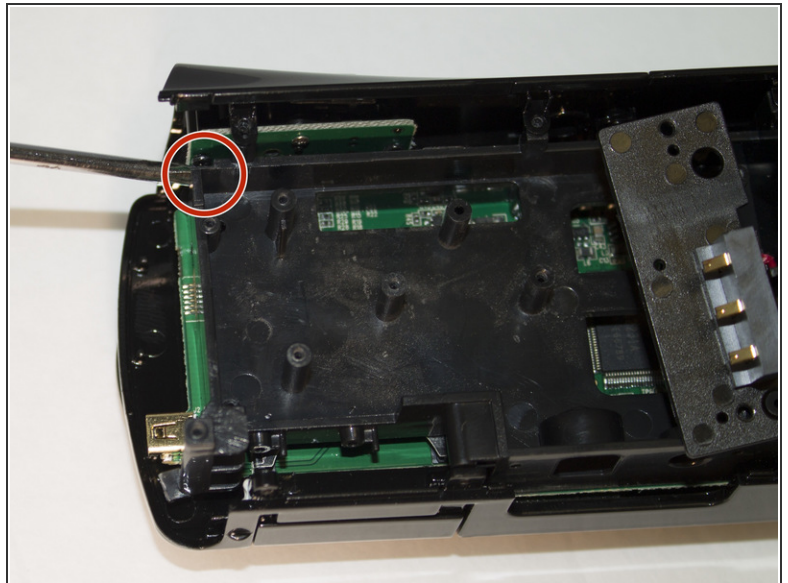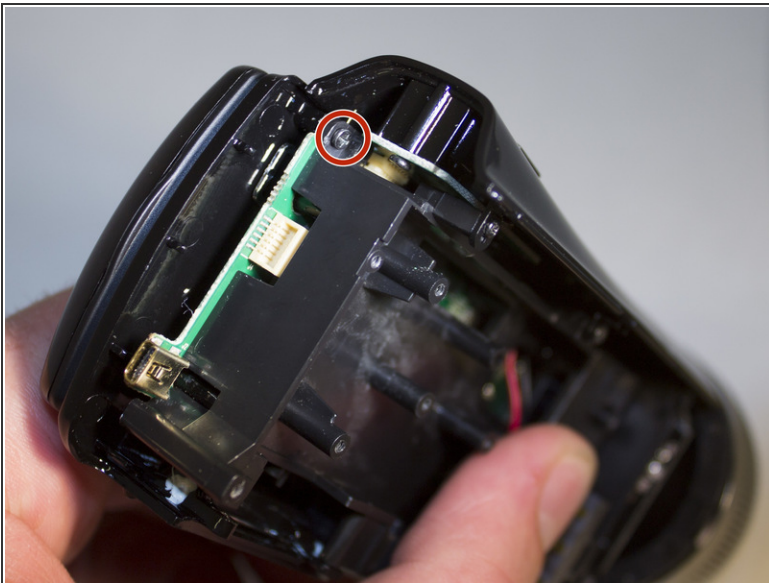


- Set aside back panel for now.
- Remove the final 4 mm Phillips #1 screw holding the screen in place. It is very small and hard to see.

Step 9

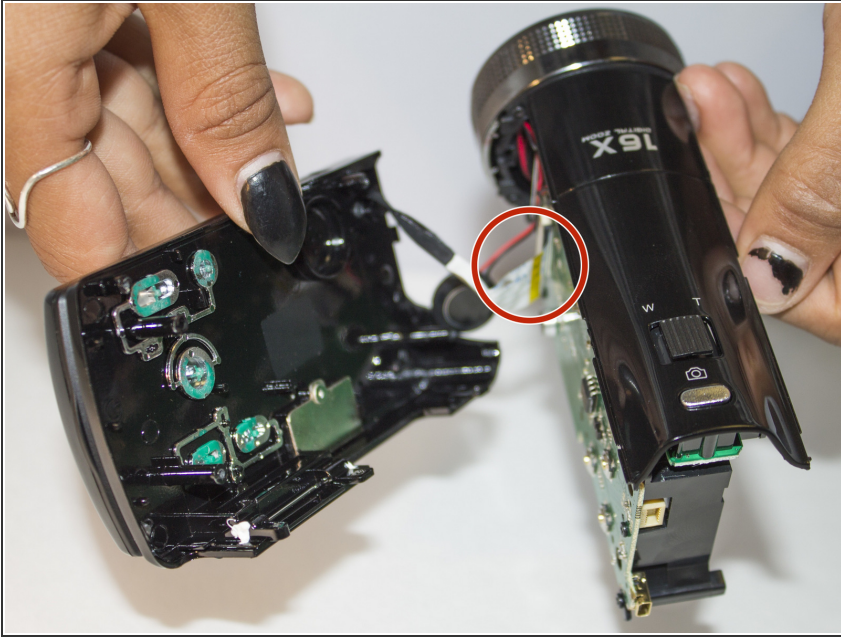



- Carefully apply pressure, away from the camera, to the screen to detach it from the body.
- The white cord should still be connected to the body.
- OPTIONAL: [Remove the screen](#) to make accessing the zoom button easier.

Step 10

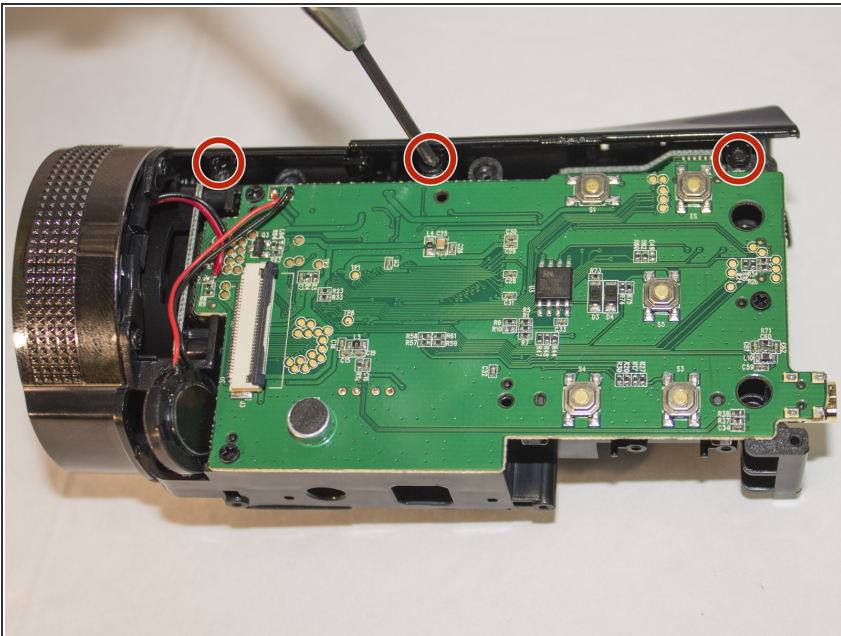



- Remove the three 4 mm Phillips #1 screws holding the top panel in place.

Step 11

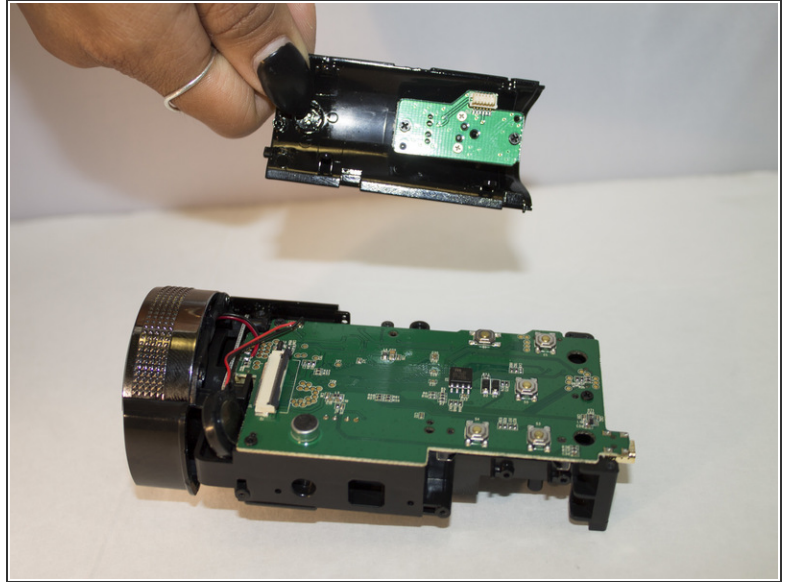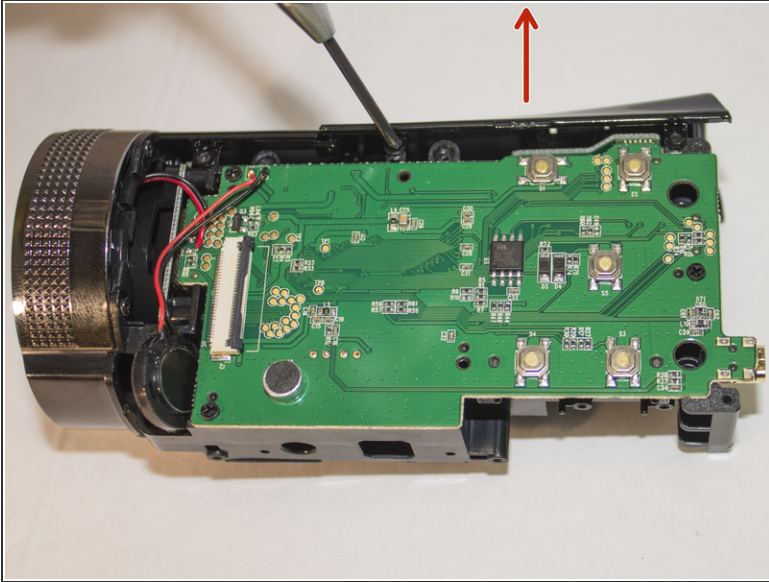


- Push upward on the top panel to remove it from the body of the camera.

Step 12

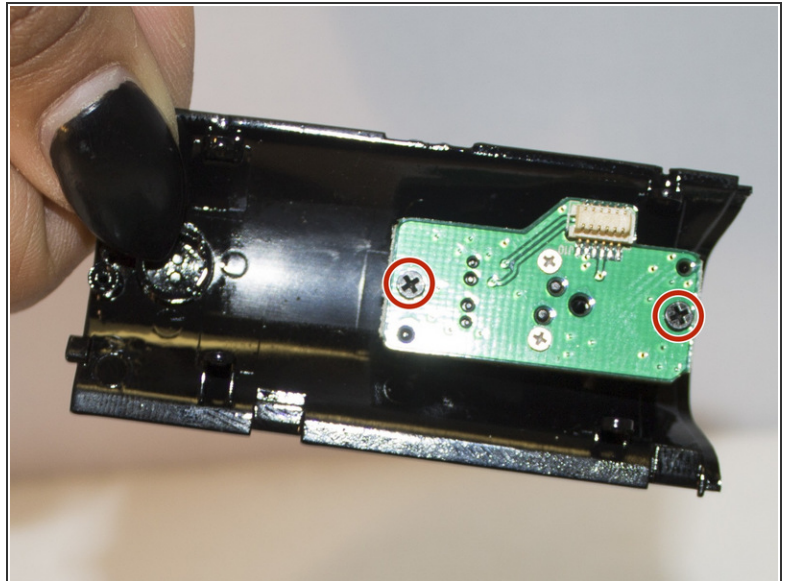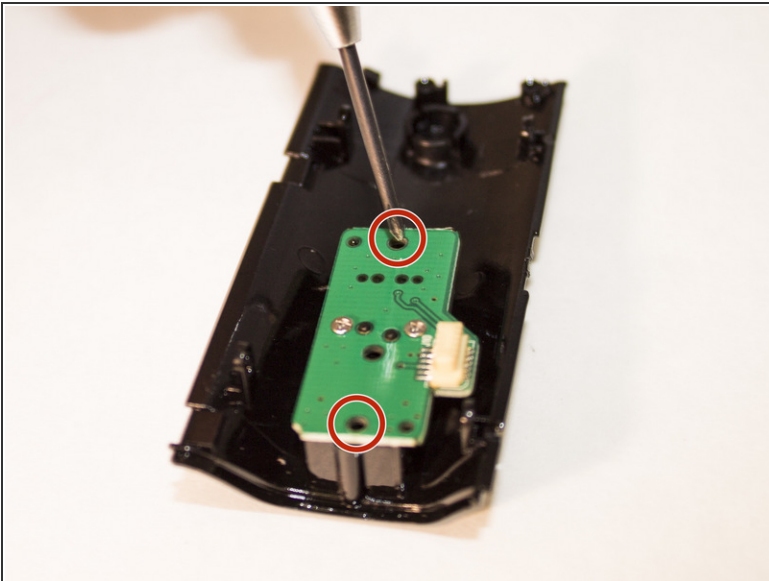

- Remove the two 4 mm Phillips #1 screws holding the circuit board in place.
- Do not remove the silver screws.

Step 13

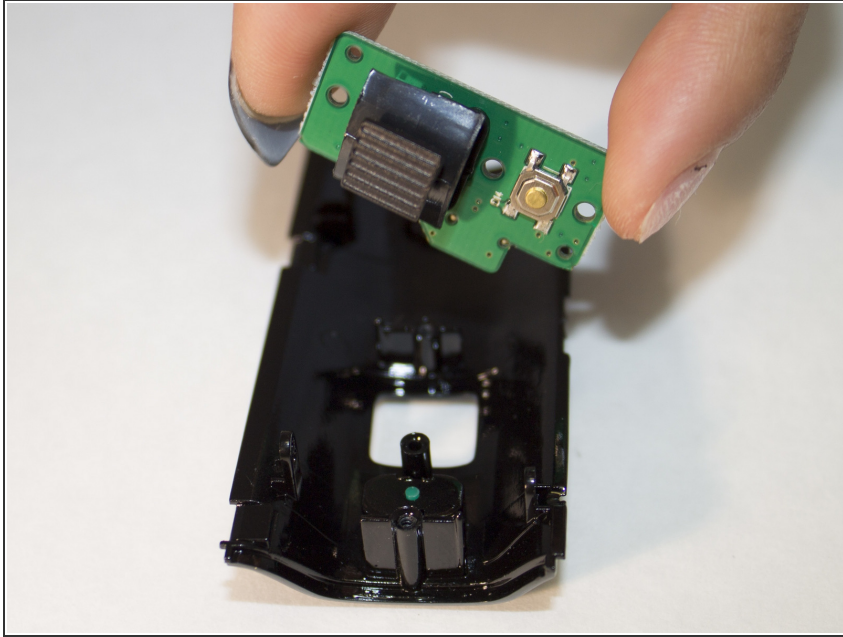

- Lift the circuit board out of the plastic casing.
- Gently pull on zoom button to remove it from the circuit board.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-24 08:12:09 AM.